

PACIFIC SELECTION



BISAZZA



BISAZZA


MOSAICO

All the Bisazza's collections here listed are available from Bisazza's warehouse in Sydney.




COLORS

hotmelt mounted



SM 77

Fillgelplus UVR 2201



SM 35


Fillgelplus UVR 3305



SM 34


Fillgelplus UVR 7704

hotmelt mounted



GL 13

Fillgelplus 2201



GL 01

Fillgelplus 1101

SMALTO 20 20 x 20 mm



SM 09

Fillgelplus UVR 8801



SM 21

Fillgelplus UVR 7704



SM 01

Fillgelplus UVR 1101

order unit: 2,07 m²

GLOSS 20 x 20 mm



FL 55


Fillgelplus UVR 1101



FL 87


Fillgelplus UVR 7704

FLOW 20 x 20 mm



FL 35

Fillgelplus UVR 7704



FL 23

Fillgelplus UVR 7704

hotmelt mounted

order unit: 2,07 m²




GM 20.77
Fillgelplus UVR 2201




GM 20.86
Fillgelplus UVR 3305



GM 20.37
Fillgelplus UVR 1101




GM 20.59
Fillgelplus UVR 7702




GM 20.49
Fillgelplus UVR 7704




GM 20.50
Fillgelplus UVR 7704



GM 20.57
Fillgelplus UVR 1104




GM 20.80
Fillgelplus UVR 1104



GM 20.97
Fillgelplus UVR 3305


GM 20.97 - GM 20.77

**VTC 20.66**


Fillgelplus UVR 1104

**VTC 20.56**


Fillgelplus UVR 1104

**VTC 20.59**

Fillgelplus UVR 7702

**VTC 20.64**

Fillgelplus UVR 7702

**VTC 20.05**

Fillgelplus UVR 7704

**VTC 20.55**


Fillgelplus UVR 1101

**VTC 20.09**


Fillgelplus UVR 1101

**VTC 20.10**


Fillgelplus UVR 1101

**VTC 20.50**


Fillgelplus UVR 7704

**VTC 20.22**


Fillgelplus UVR 7704

**VTC 20.65**


Fillgelplus UVR 3305

**VTC 20.80**


Fillgelplus UVR 1101

**VTC 20.96**


Fillgelplus UVR 8801

**VTC 20.44**

Fillgelplus UVR 7704

**VTC 20.42**

Fillgelplus UVR 8801

**VTC 20.58**


Fillgelplus UVR 1104

paper face mounted

order unit: 1,29 m²



12.01
Fillgelplus UVR 3305

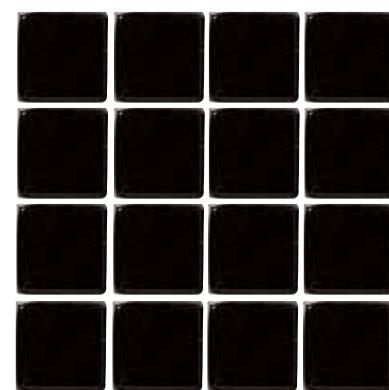

12.09
Fillgelplus UVR 2201




12.09



BLEND'S

hotmelt mounted

order unit: 2,07 m²

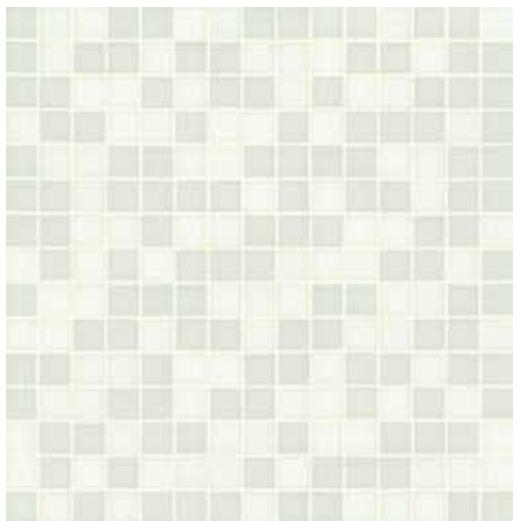


VTC 20.09
VTC 20.10



SM 01
VTC 20.10

GHIACCIO
Fillgelplus UVR 1101 bianco alabastro

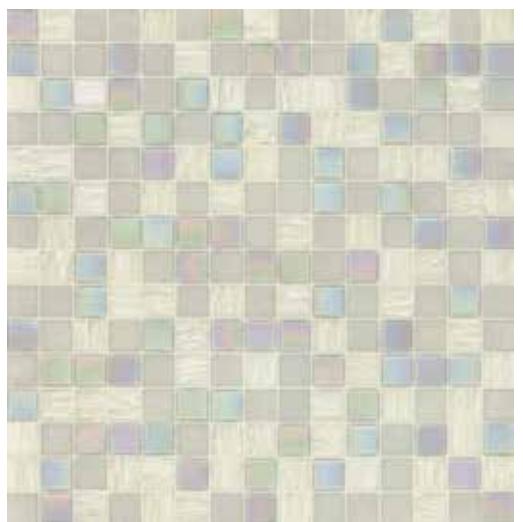

GL 12
SM 42
VTC 20.55



GL 01
SM 01

LAURA
Fillgelplus UVR 1101 bianco alabastro



VTC 20.09
VTC 20.37

OSLO
Fillgelplus UVR 1101 bianco alabastro



GHIACCIO

Suggested grouting: epoxy coloured grout Fillgel Plus UVR (UV resistant)

hotmelt mounted


order unit: 2,07 m²



BUDAPEST

Fillgelplus UVR 1101 bianco alabastro


GM 20.37
VTC 20.33
VTC 20.32
VTC 20.55

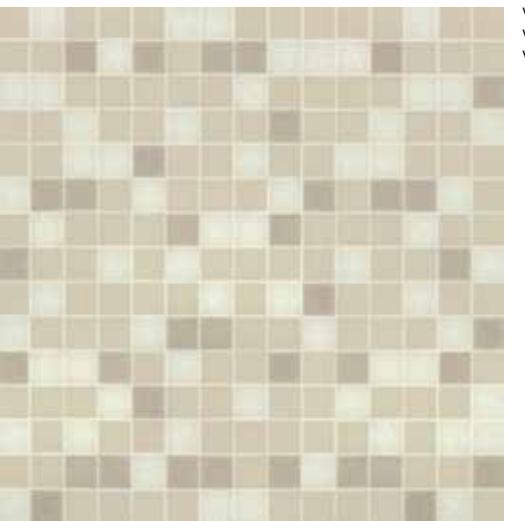

NUVOLE

Fillgelplus UVR 1101 bianco alabastro


VTC 20.32
VTC 20.37
VTC 20.55

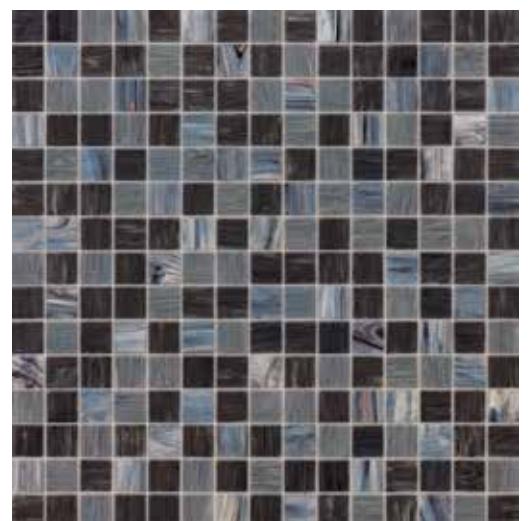

STEFANIA

Fillgelplus UVR 3305 grigio piombo


SM 35
SM 36
GM 20.86

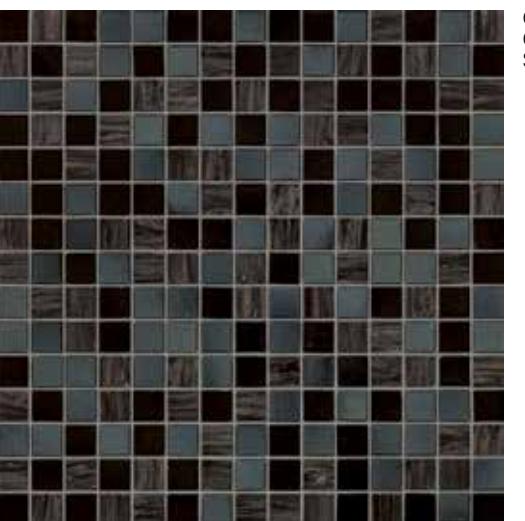

ISIDE

Fillgelplus UVR 2201 nero ebano


GL 13
GM 20.77
SM 77

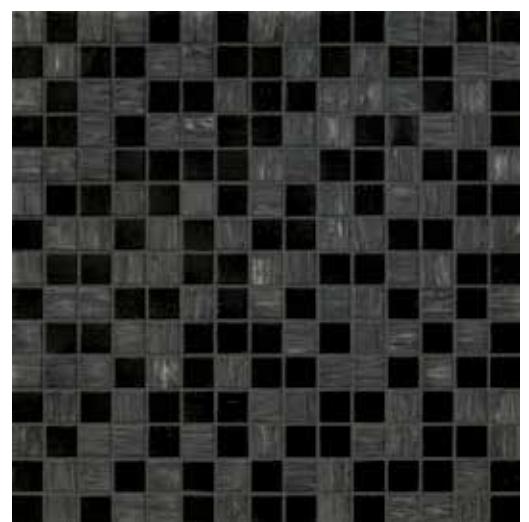

RACHELE

Fillgelplus UVR 2201 nero ebano


SM 36
SM 77

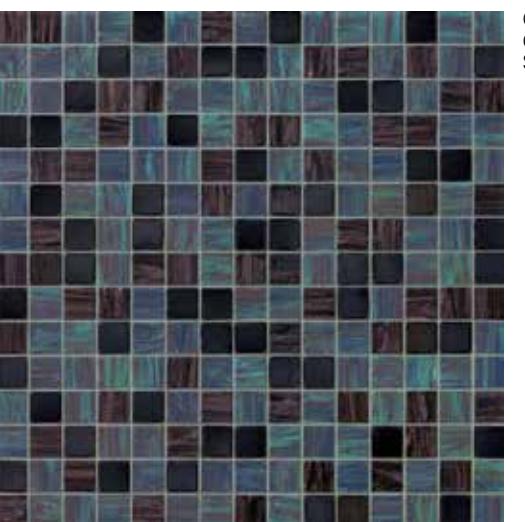

ILARIA

Fillgelplus UVR 3305 grigio piombo

GL 13
GM 20.57
SM 77

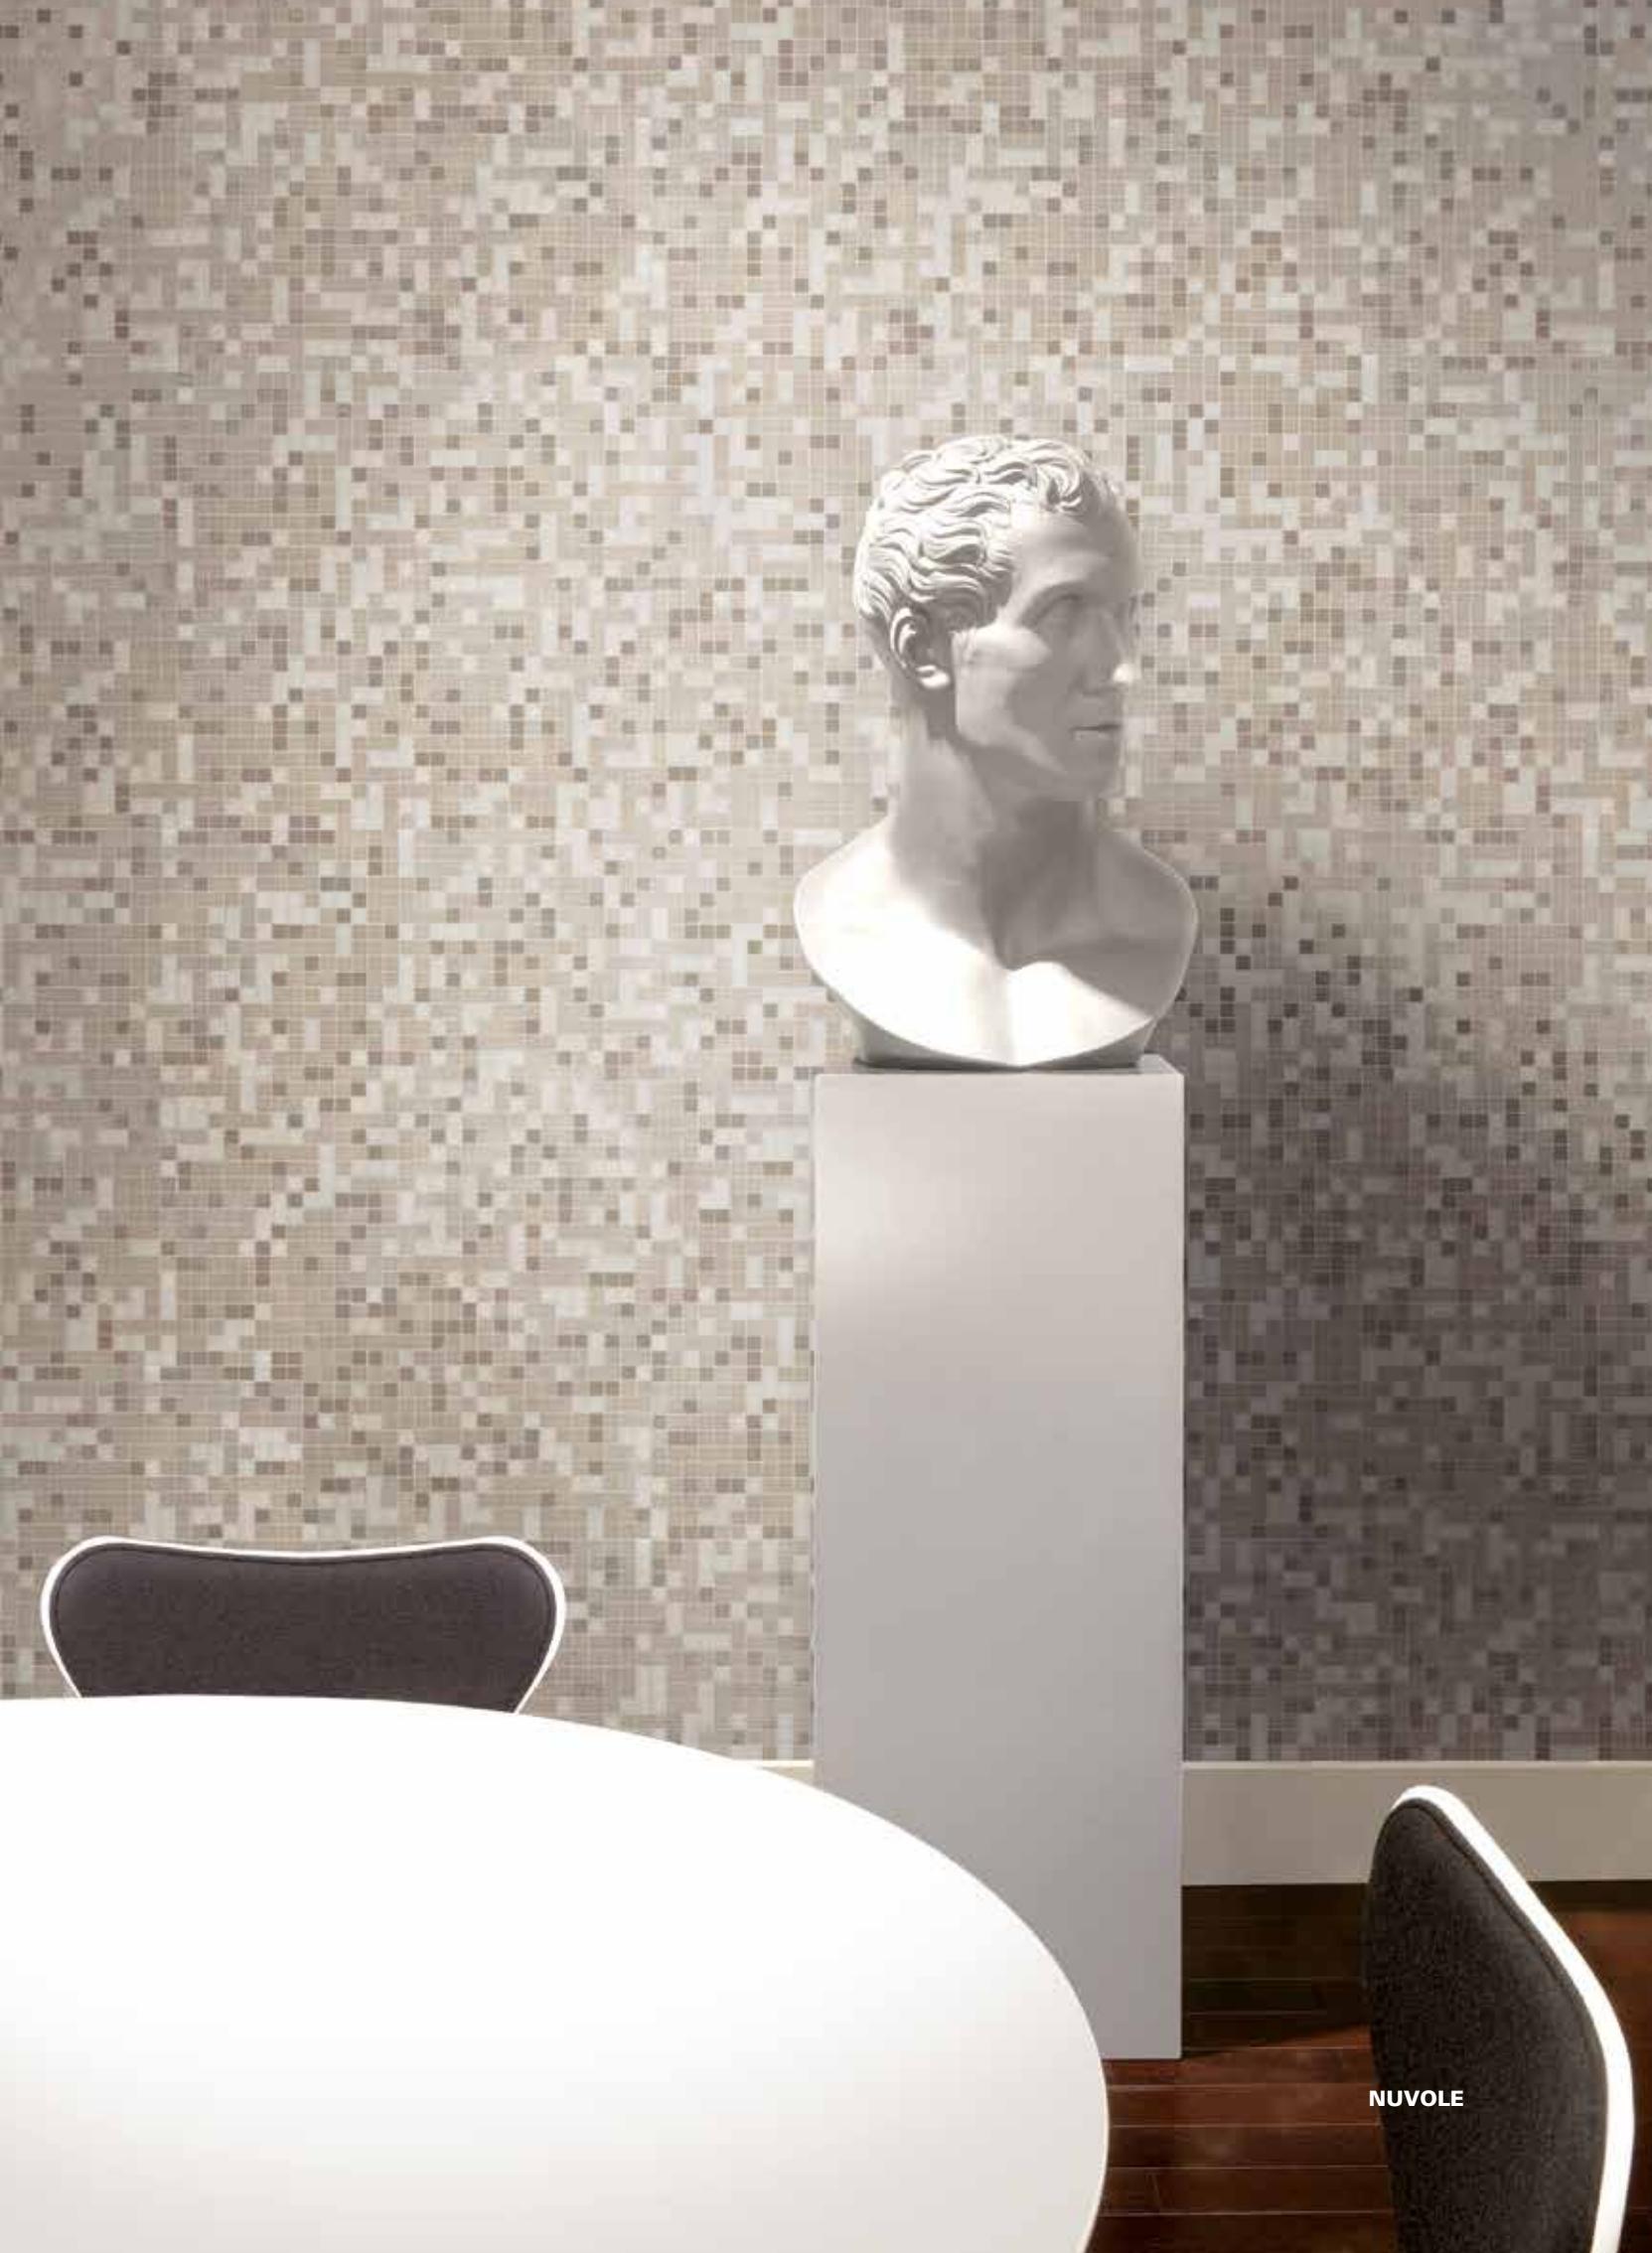

NUVOLE


Suggested grouting: epoxy coloured grout Fillgel Plus UVR (UV resistant)



TALLINN

Fillgelplus UVR 7704 grigio azzurro


GM 20.87
VTC 20.87
SM 21

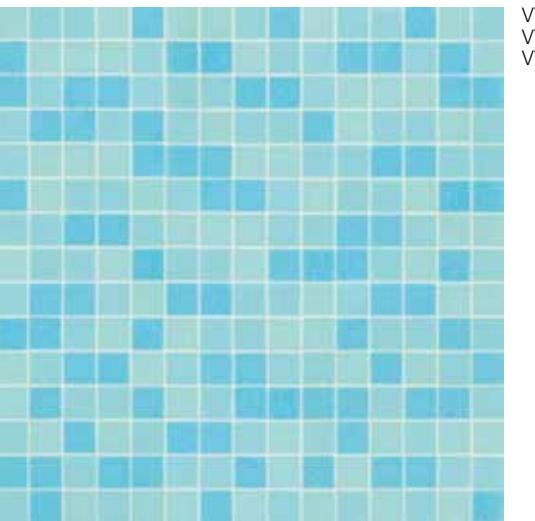

GALAPAGOS

Fillgelplus UVR 7704 grigio azzurro

VTC 20.22
VTC 20.24
VTC 20.87

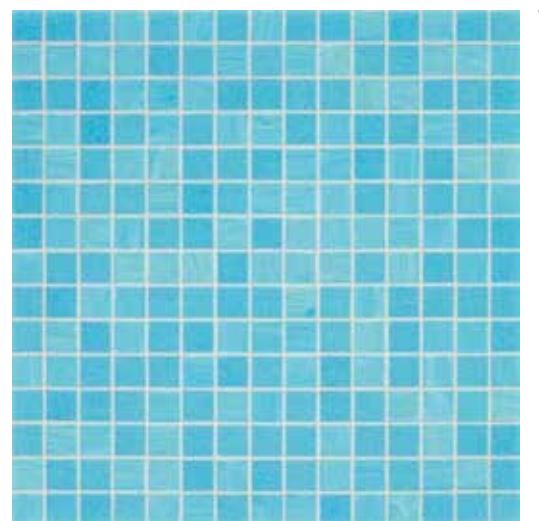

PALMA

Fillgelplus UVR 7704 grigio azzurro


VTC 20.24
SM 04



AUDREY

Fillgelplus UVR 7704 grigio azzurro

GL 07
GM 20.87

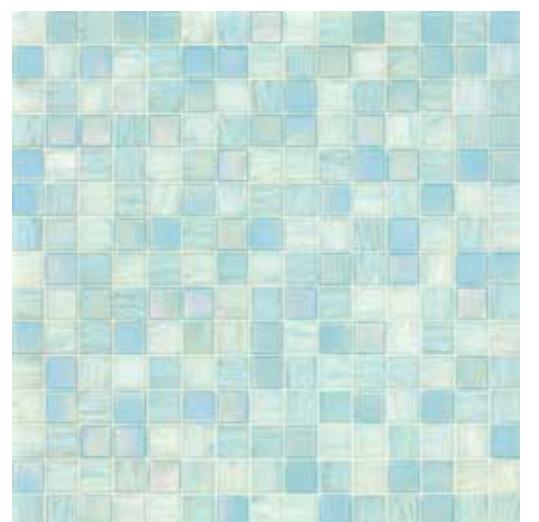

EMANUELA

Fillgelplus UVR 7704 grigio azzurro

GL 07
SM 21
SM 37



ELISABETTA

Fillgelplus UVR 1101 bianco alabastro

GL 01
SM 01
SM 37



AUDREY




SALICE

hotmelt mounted

order unit: 2,07 m²



VTC 20.09
VTC 20.24
VTC 20.05
VTC 20.87

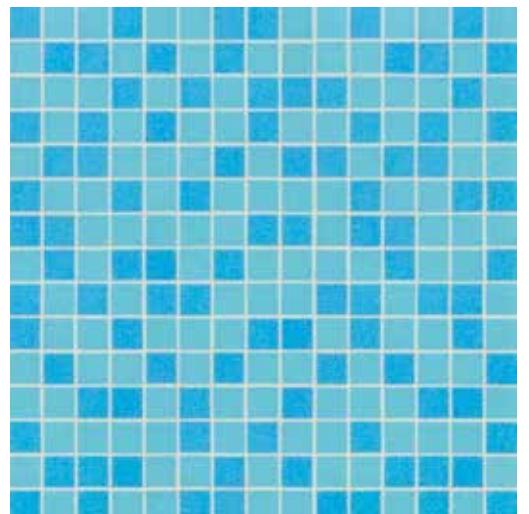

VTC 20.23
VTC 20.24



SEYCHELLES

Fillgelplus UVR 1101 bianco alabastro




GL 08
SM 04
GM 20.50



GL 09
SM 05
SM 06
GM 20.50

SOPHIA

Fillgelplus UVR 7704 grigio azzurro

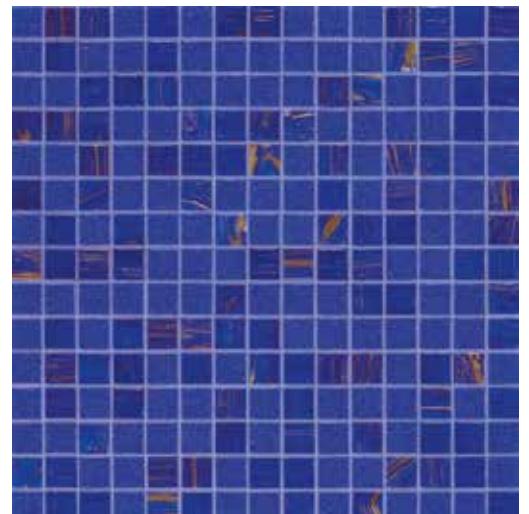

SM 07
VTC 20.46
GM 20.30



GM 20.59
SM 06
VTC 20.59
VTC 20.64

ISTANBUL

Fillgelplus UVR 7702 blu cobalto

SOPHIA

Suggested grouting: epoxy coloured grout Fillgel Plus UVR (UV resistant)

hotmelt mounted

order unit: 2,07 m²



SM 09
GM 20.49




VTC 20.40
GM 20.49
GM 20.57

PAOLA

Fillgelplus UVR 8801 verde turchese



GM 20.35
SM 20
VTC 20.35

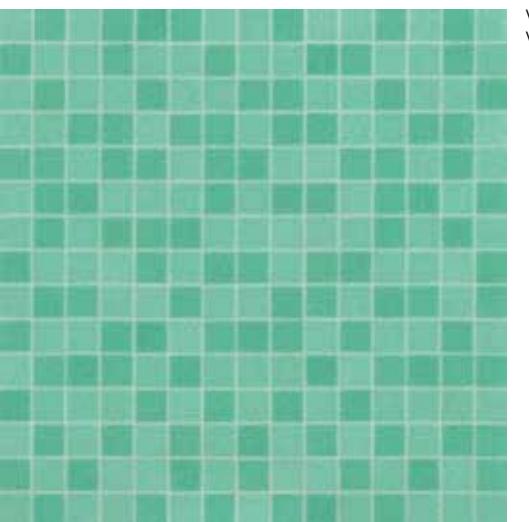


VTC 20.35
VTC 20.42

MALIBU

Fillgelplus UVR 8801 verde turchese



SM 08
SM 23
VTC 20.35
VTC 20.42

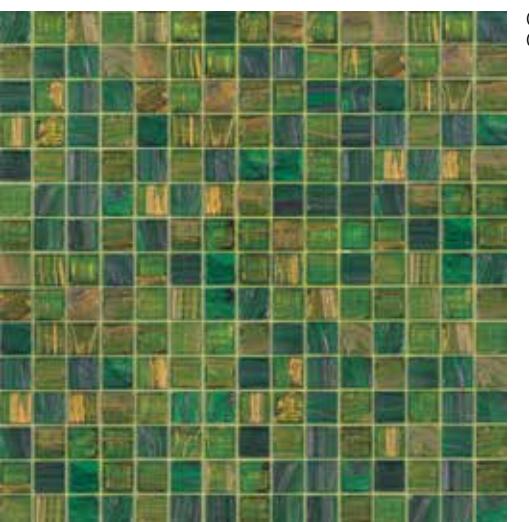

GM 20.55
GM 20.80

TEA

Fillgelplus UVR 8801 verde turchese

Suggested grouting: epoxy coloured grout Fillgel Plus UVR (UV resistant)





NEW CIPRO
Fillgelplus UVR 3305 grigio piombo



MARILYN
Fillgelplus UVR 1104 neutro base



GLORIA
Fillgelplus UVR 7704 grigio azzurro



DELHI
Fillgelplus UVR 3305 grigio piombo



TRIPOLI
Fillgelplus UVR 3305 grigio piombo



MARILYN



Designed by Marcel Wanders in his unique signature style, the Frozen Garden collection by Bisazza marks the company's first collection of ceramic tiles. The hexagonal tiles are available in diamond and flower shapes and can be freely arranged to transform walls into a tactile three-dimensional surface.


BISAZZA

CERAMICA

MARCEL WANDERS
COLLECTION



WHITE FROZEN CRYSTAL

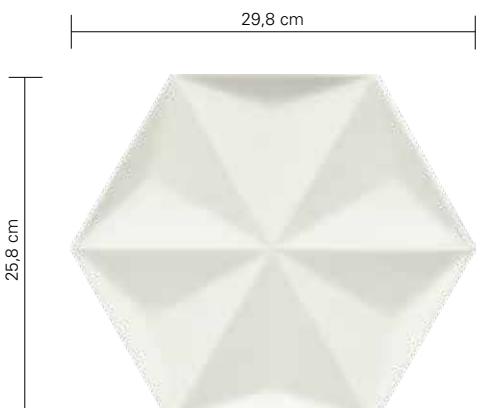

WHITE FROZEN CRYSTAL



WHITE FROZEN FLOWER



WHITE FROZEN CRYSTAL



WHITE FROZEN GARDEN




WHITE FROZEN FLOWER



Bisazza Bagno, The Wonders Collection


WHITE FROZEN GARDEN

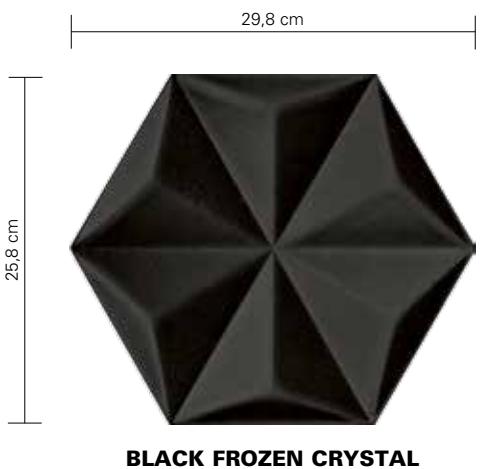


BLACK FROZEN CRYSTAL



BLACK FROZEN FLOWER

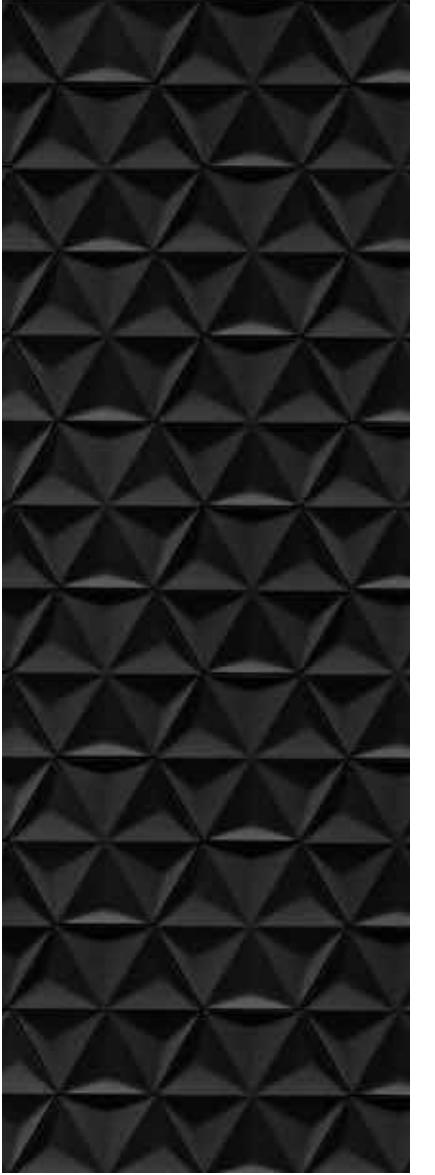

BLACK FROZEN CRYSTAL

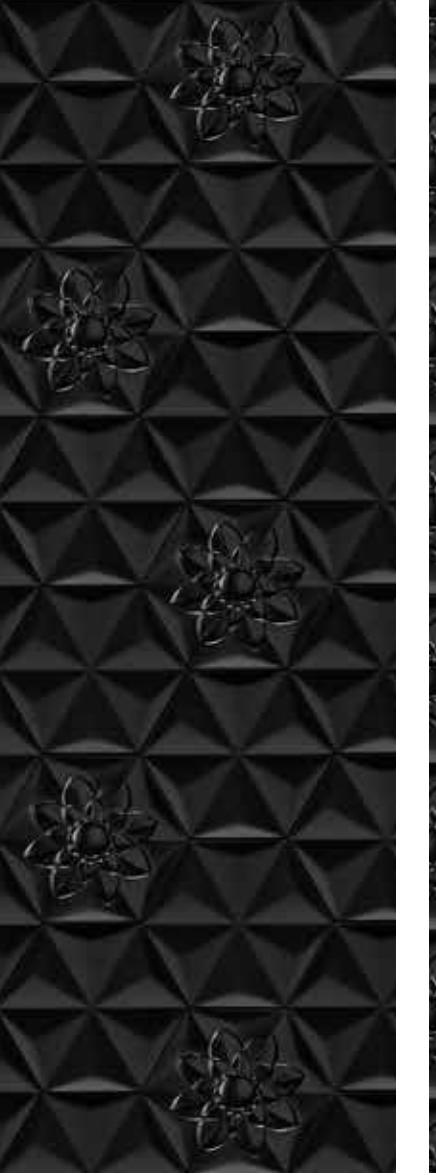

BLACK FROZEN GARDEN



BLACK FROZEN FLOWER



BLACK FROZEN GARDEN

WEIGHT AND DIMENSIONS

**FLOW
VETRICOLOR 20
LE GEMME 20
SMALTO 20
GLOSS**

size	20 x 20mm	12 x 12mm	
thickness	4mm	4mm	
sheet size	322 x 322mm	293 x 293mm	
tesserae per sheet	225	529	
joint	~1,57mm	~0,7mm	
weight	7 kg/m ²	7,5 kg/m ²	
sheets per carton	20	15	
quantity per carton	2,07 m ²	1,29 m ²	

OPUS ROMANO 12

FROZEN CRYSTAL FROZEN FLOWER FROZEN GARDEN

size	29,8x25,8 cm	29,8x25,8 cm	-
thickness	9 mm	9-20 mm	-
pieces per box	12	6	7+2*
quantity per carton	0,70 m ²	0,35 m ²	0,525 m ²
weight	~ 12,4 Kg/m ²	~ 15,4 Kg/m ²	~ 12,7 Kg/m ²
weight per carton	~ 8,7 kg	~ 5,4 kg	~ 6,7 kg
cartons per pallet	60	60	60
quantity per pallet	41,76 m ²	20,88 m ²	31,5 m ²
pallet dimensions	cm 80x120x90h	cm 80x120x90h	cm 80x120x90h
pallet weight	~ 522 kg	~ 324 kg	~ 402 kg

* n.7 Frozen Crystal + n.2 Frozen Flower

TECHNICAL SECTION

TEST DATA

	ESTABLISHED LIMITS	VETRICOLOR	FLOW	LE GEMME	SMALTO	GLOSS	OPUS ROMANO
ISO 10545 - 9 resistance to thermal shock	15°C - 145°C	resistant	resistant	resistant	resistant	resistant	resistant
ISO 10545 - 13 resistance to chemical attack	-	resistant	resistant	resistant	resistant	resistant	resistant
ISO 10545 - 12 frost resistance	-	resistant	resistant	resistant	resistant	resistant	resistant
DIN 51094 colours' resistance to fading	-	resistant	resistant	resistant	resistant	resistant	resistant
ISO 10545 - 14 stains resistance	-	resistant	resistant	-	-	-	resistant
ISO 10545 - 3 water absorption	E ≤ 0,5 %	< 0,5	< 0,5	< 0,5	< 0,5	< 0,5	< 0,5
ISO 10545 - 6 resistance to deep abrasion	V [mm²] ≤ 175	-	-	-	-	-	227 mm²
DIN 51097 antslip value	A (12°-18°) B (18°-24°) C (+24°)	A+B	A	A+B	A+B	-	A
DIN 51130 antslip value	R9 - R13	R9	R10	R9	R9	-	-
ANSI A 137.2 - 2012 resistance to thermal shock	15°C - 71°C	resistant	resistant	resistant	resistant	resistant	resistant

SPECIFICATION DATA

VETRICOLOR 20

Glass mosaic of square and bevelled tesserae, facial dimensions 20 x 20 mm, with a thickness of 4 mm. It is hotmelt mounted, with a joint of 1,57 mm. Overall sheet dimensions 322 x 322 mm.

SMALTO 20

Glass and enamel mosaic of square and bevelled tesserae, facial dimensions 20 x 20 mm, with a thickness of 4 mm. It is hotmelt mounted, with a joint of 1,57 mm. Overall sheet dimensions 322 x 322 mm.

LE GEMME 20

Glass and Avventurina mosaic of square and bevelled tesserae, facial dimensions 20 x 20 mm, with a thickness of 4 mm. It is hotmelt mounted, with a joint of 1,57 mm. Overall sheet dimensions 322 x 322 mm.

GLOSS

Iridescent glass mosaic of square and bevelled tesserae, facial dimensions 20 x 20 mm, with a thickness of 4 mm. It is hotmelt mounted, with a joint of 1,57 mm. Overall sheet dimensions 322 x 322 mm.

FLOW

Glass mosaic of square and bevelled tesserae with undulating surface, facial dimensions 20 x 20 mm, with a thickness of 4 mm. It is hotmelt mounted, with a joint of 1,57 mm. Overall sheet dimensions 322 x 322 mm.

OPUS ROMANO 12

Venetian enamel mosaic of square tesserae, facial dimension of 12 x 12 mm, with a thickness of 4 mm. It is paper face mounted with a joint of ~0,7 mm. Overall sheet dimensions 293 x 293 mm.

FROZEN GARDEN

White-body single-fired tiles EN 14411 ISO 13006-L (BIII-GL)AA.

FILLGELPLUS UVR

Special coloured epoxy grout UV resistant for Bisazza glass mosaic, washable with water.

ESTABLISHED LIMITS

FROZEN GARDEN

WARNING

ISO 10545-3 water absorption	> 10%	18,9 %
ISO 10545-2 straightness of sides	+/- 0,5% max +/- 1,5 mm max	Complies with the standards
ISO 10545-9 thermal shock resistance		Resistant
ISO 10545-13 resistance to chemical attack		Complies with the standards
ISO 10545-14 stains resistance	Min Class 1 Max Class 5	Class 5



For correct application, the support must have a perfectly smooth, even and white surface, and must be mature, dry, sound and stable. Before the application, all the materials should be stored in a dry place sheltered from rain and humidity. For information on use with fibreglass or steel swimming pools, contact Bisazza's technical office (installation.department@bisazza.com). Always follow the instructions reported in the technical sheets.

MAINTENANCE AND CLEANING OF GLASS MOSAIC SURFACES

Use ordinary cleaning products for maintenance and cleaning of glass mosaic surfaces (except those containing hydrofluoric acid or phosphoric acid), being careful to rinse thoroughly with water. Alkaline detergents should be used carefully and rapidly rinsed out with water. Any cleaning product should not be used on heated or directly exposed to sunrays surfaces. Avoid using abrasive tools and high pressure jets of water.

Suggested grouting: FILLGELPLUS UVR

Special coloured epoxy grout UV resistant for Bisazza glass mosaic, washable with water

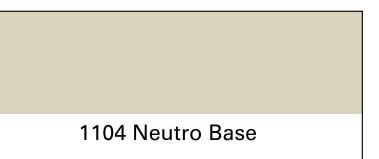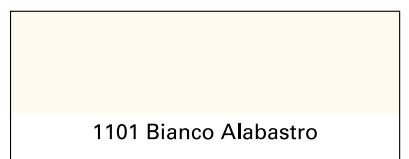

HOTMELT SYSTEM

A STRONGER MOSAIC ADHESION WITH THE BISAZZA PU HOTMELT SYSTEM.

Bisazza has developed an innovative support system for tile sheets to meet the requirements of the latest Australian standards.

The latest hotmelt cross linking system uses polyurethane, (PU) thermo set adhesive.

The Bisazza range of mosaic is recommended for use in swimming pools, spas and other installations where mosaic is immersed.

To further enhance the installation and the aesthetic appearance of the mosaic, Bisazza recommend the Bisazza range of Fillgel which has been further improved to provide a greater resistance to UV.

CERTIFIED BY CSIRO UNDER THE FOLLOWING SPECIFICATIONS:

AS 3958.1.2007 PART 1

Tile adhesive coverage 90%

Minimum contact coverage must be:

Residential floors 80%

Commercial and industrial walls 80%


Commercial and industrial floors 90%

Wet areas 90%

Swimming pools 90%

External walls 90%

Exterior floors, decks and roof 90%

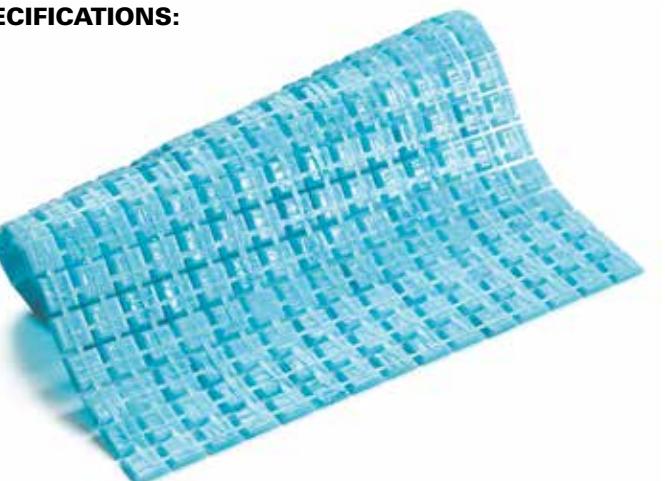

AS ISO 13007.2.2013

Tile adhesion strength

Bisazza Australia

Tel. 02 98389233
Fax 02 96749253
info.australia@bisazza.com
www.bisazza-australia.com.au